

Pallet Specifications

Pallet Manufacturing LLP



Prepared By: Amol Pawar


Company: Pallet Manufacturing LLP

Analysis ID: 1500x1500x140mm

Address:

Date:

Pallet Information: 1500 mm L x 1500 mm W, Weight - 93.9 kg Heat Treated, Reusable, New
Pallet Description: 2way, DoubleFace, Non-reversible, Flush

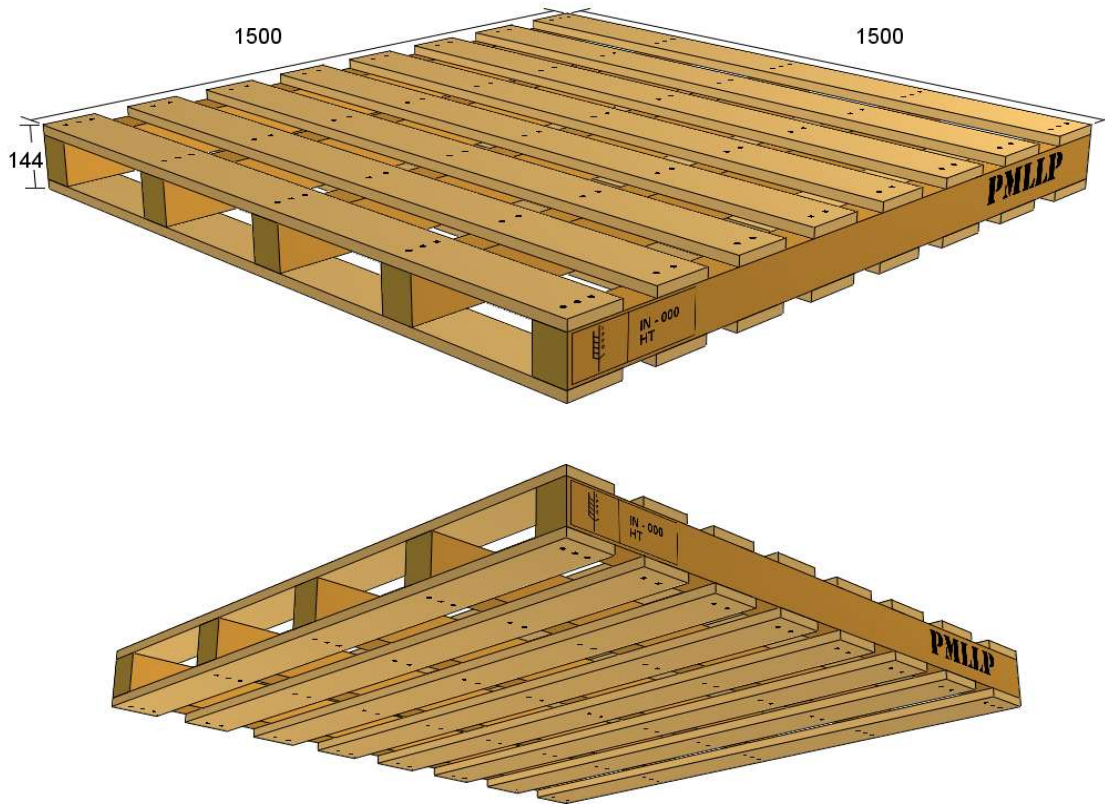

Components

Top Deck Boards (mm)				Lumber
Quantity	Thickness	Width	Length	
8	22	120	1500	
Stringers (mm)				
Notch: 2way				
Quantity	Height	Width	Length	
5	100	75	1500	
Bottom Deck Boards (mm)				
Quantity	Thickness	Width	Length	
8	22	120	1500	
Fastener Counts: 180				ISPM 15 Compliant - Heat Treated (HT)
Notes:				
1. _____				3. _____
2. _____				4. _____

0.1196 cu m using one species class
 100% High Density Hardwoods (HDH)
 Premium & Better grade
 Kiln Dried(KD19)19%

Customer/Vendor Pallet Specifications Pallet Manufacturing LLP

(dimensions in millimeters)





Prepared By: Amol Pawar

Company: Pallet Manufacturing LLP

Analysis ID: 1500x1500x140mm

Address:

Date:

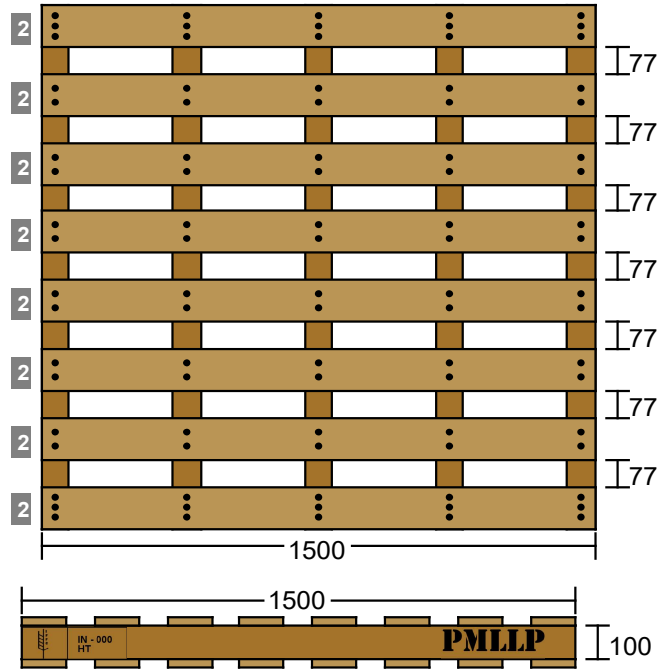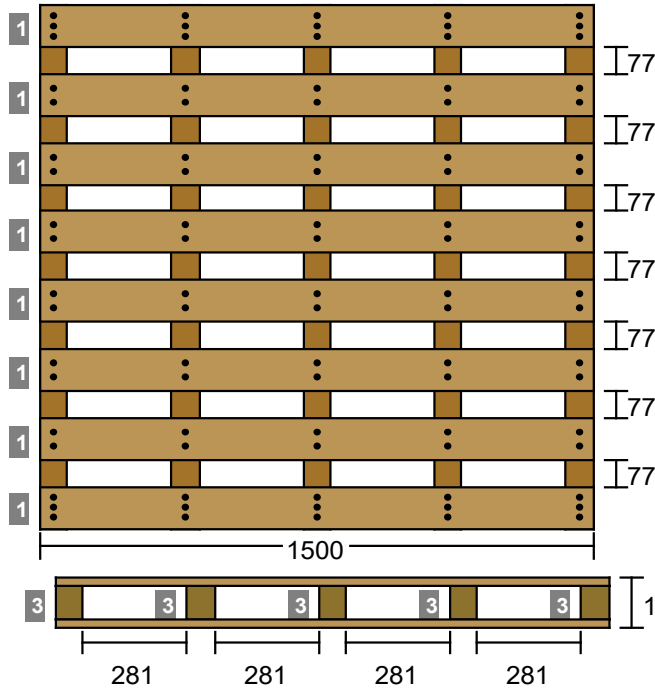

Top Deck Boards			Bottom Deck Boards			Stringers		
Item	Qty.	Dimensions	Item	Qty.	Dimensions	Item	Qty.	Dimensions
1	8	22T x 120W x 1500L	2	8	22T x 120W x 1500L	3	5	100H x 75W x 1500L

Style: Reusable, 2way, DoubleFace
Non-reversible

Lumber: **Acceptable Lumber Species:**
100% High Density Hardwoods

Min Part Grade: Premium & Better

Max Moisture Content: 19%

Fastener Counts: 180

Length: _____

Gauge: _____

Type: _____

Point: _____

Dimensional Tolerance:
Out of Square deviation 6 mm
(12 mm Difference in diagonals).
Overall Length & Width deviation + or - 5 mm.
Overall pallet height deviation + or - 3 mm.
Pallets shall lie flat at all points within 12 mm.

Notes: (lengths in millimeters)
ISPM 15 Compliant – Heat Treated (HT)

1. _____

2. _____

3. _____

4. _____

Approved

Version No.

ID.

Drawing No.